

Thank you for purchasing a Zero Clearance insert.

The insert replaces the original of the Bosch GTS 10 XC and can only be used for 90 degree cuts.

For miter cuts please use the original insert.

Delivered content:

1x ZC-GTS10xc Zero Clearance insert

Required tools:

- Screwdriver
- Allen key 3mm

Installation instructions:

Disconnect the machine from the power before carrying out any work

1. Remove the original insert of the Bosch GTS 10 XC with a flat-head screwdriver.



2. Move the saw blade completely downwards.




3. Unscrew the plastic adjustment screw far enough to keep the Zero Clearance insert in the opening of the saw.




4. Then insert the Zero Clearance insert and adjust to height using a 3mm Allen key and a straight object (here a locksmith angle).


The insert can stay slightly under the table top and slightly over it at the back. This prevents workpieces from being able to hang.

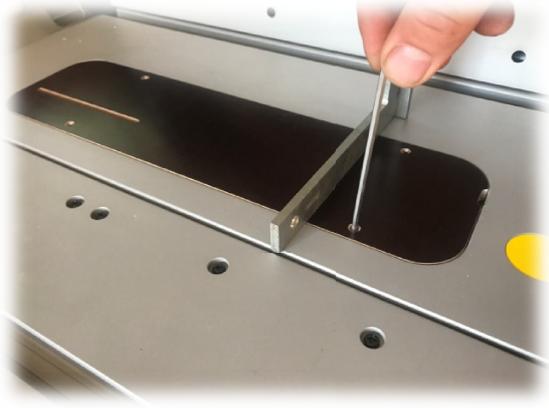

5. Then place both stops over the insert so that the insert can not be accidentally pushed out when the saw blade is raised and also the stops are not damaged.

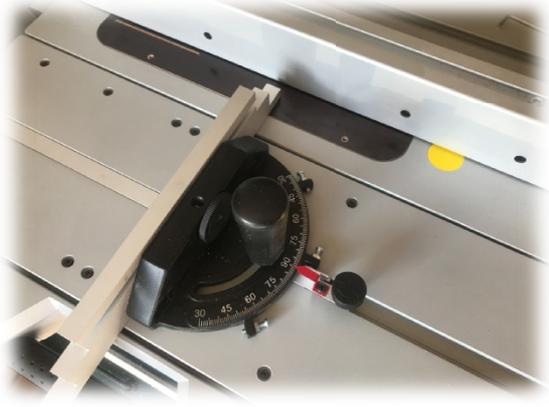

6. Then slowly raise the saw blade while the saw is running.

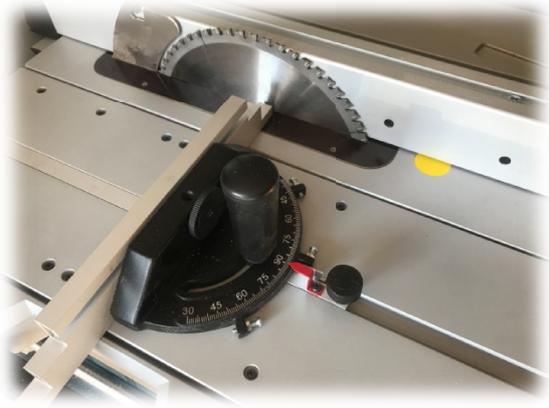

Now they can work with the saw